

Ultrapure Fluid Handling Integrated Pump System Series



BPS-i100

2 bar	(29 psi)
20 liters/min	(5.3 gallons/min)

No Bearings. No Seals. No Contamination!

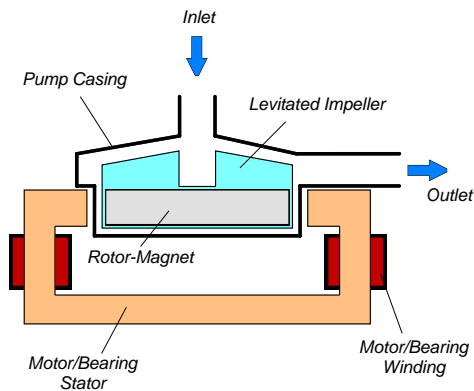


Figure 1: Schematic of the main elements of the MagLev centrifugal pump

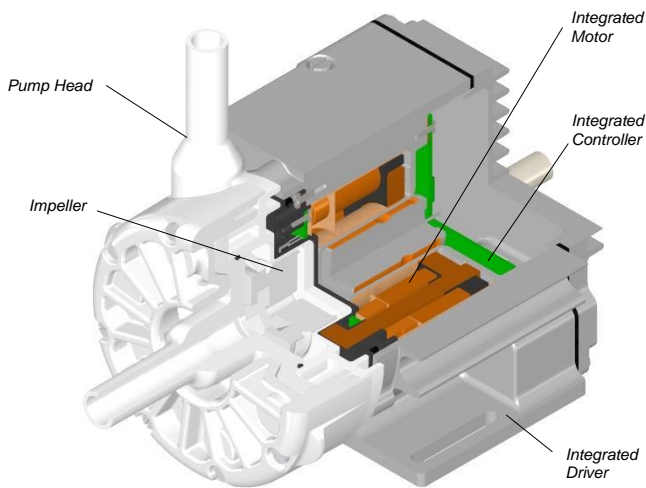


Figure 2: Integrated MagLev pump driver with pump head

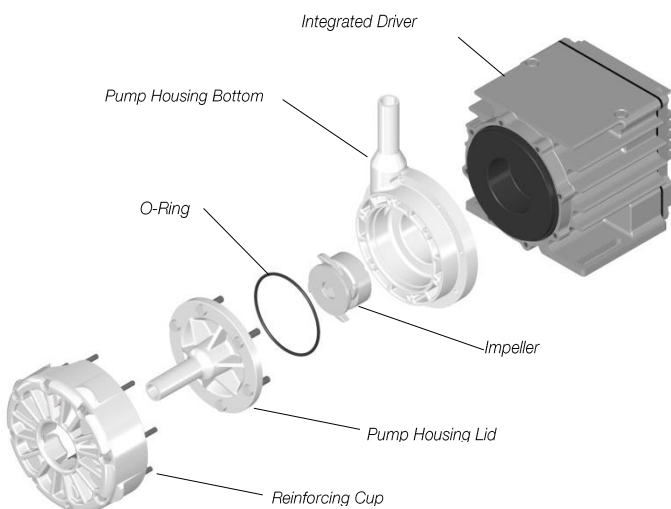


Figure 3: Disassembled pump head

INTRODUCTION

The *BPS-i100* pump system is a revolutionary centrifugal pump that has no bearings to wear out or seals to break down and fail. Based on the principles of magnetic levitation, the pump impeller is suspended, contact-free, inside a sealed casing and is driven by the magnetic field of the motor (*Figure 1*).

The impeller and casing are both fabricated from chemical-resistant high purity fluorocarbon resins. Together with the rotor magnet they make up the pump head.

The controller and the motor are integrated into the driver housing (see *Figure 2*), hence cabling effort is reduced. Fluid flow rate and pressure are precisely controlled by electronically regulating the impeller speed without pulsation.

SYSTEM BENEFITS

- Extremely low particle generation due to the absence of mechanically contacting parts.
- Increased equipment uptime.
- Lower maintenance costs by eliminating valves, bearings, rotating seals and costly rebuilds.
- Very low integration costs as no external controller is needed for speed or closed loop control.
- Reduced risk of contamination due to the self-contained design with magnetic bearings.
- Very gentle to sensitive fluids due to low-shear design.
- No narrow gaps and fissures where particles or microorganisms could be entrapped.
- Smooth, continuous flow without pressure pulsation.
- Electronic speed control.
- Compact design compared to pneumatic and mag-drive pumps.
- Proven technology in medical and semiconductor industry (MTBF > 50 years).

APPLICATIONS

- Semiconductor wet processing.
- Flip chip and advanced packaging.
- Solar cell production.
- Flat panel display manufacturing.
- Hard-disk fabrication.
- Printer ink handling.
- Pharmaceutical production.
- Plating.
- Circulation in flow batteries.

SYSTEM CONFIGURATION – “STAND-ALONE”

Figure 7 and Figure 11 illustrate a “Plug and Play” stand-alone system with integrated user panel and buttons to set the speed manually. The driver also contains a PLC interface for remote speed control by analog and digital signals.

Various accessories are available like a desktop power supply with relevant power cable and signal cables to connect to the PLC.

SYSTEM CONFIGURATION – “EASYCONNECT”

The “EasyConnect” models (see Figure 8 and Figure 13) with according cable accessories are designed to realize various interface configurations with minimal setup effort.

Two Fieldbus connectors (IN and OUT) allow to setup arrays of multiple pumps. Therefore serial pumping configurations as shown in Figure 9 can be realized. The PLC interface allows not only remote control by analog/digital signals but also connections of external sensors hence enabling for example a precise flow or pressure control (see notes below).

For enhanced chemical protection of the motor and cable connectors, protective connector covers (see Figure 18) are available.

SYSTEM CONFIGURATION – “OEM”

The “OEM” models are designed for a compact integration with one integrated driver cable containing all available interface signals (see Figure 10 and Figure 15). Basically all configurations of the “EasyConnect” models are possible allowing the users with integration capabilities to adapt the cable to their needs.

PROCESS CONTROL WITH FEEDBACK SENSORS

Together with an external sensor process parameters like flow or pressure can be controlled or monitored as shown in Figure 10.

Precise ultrapure flow control systems can be realized with the BPS-i100 pump system in combination with LEVIFLOW® flowmeters. Levitronix® provides either turnkey solutions for closed loop flow control or helps to design your own flow control system. Experience has been gained with fluids such as CMP slurries, surface-conditioning chemicals, plating solutions, ultrapure water and solvents.

The versatility of Levitronix® flow control systems goes far beyond the capabilities of simple flow controllers. In addition to the flow control function, the Levitronix® control firmware comes with several condition monitoring features to monitor the integrity of the fluid circuit. Levitronix® flow control systems can generate alarms for preventive filter exchange, no-flow conditions or line clogging. Dynamic Condition Trending (DCT) enables failure prediction and scheduling of preventive maintenance (Figure 6).

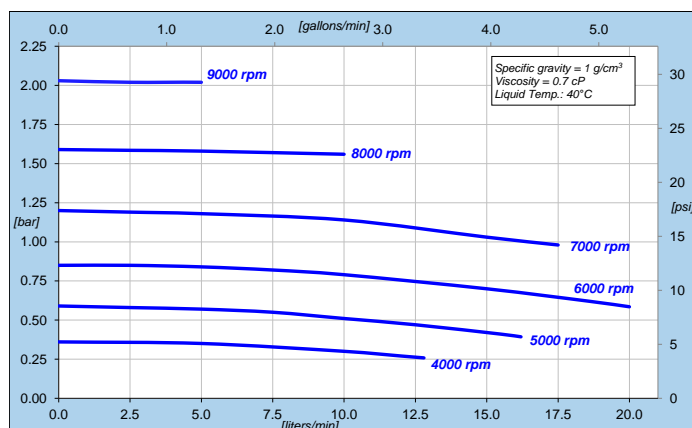


Figure 4: Pressure/flow curves for aqueous liquids (similar to water)

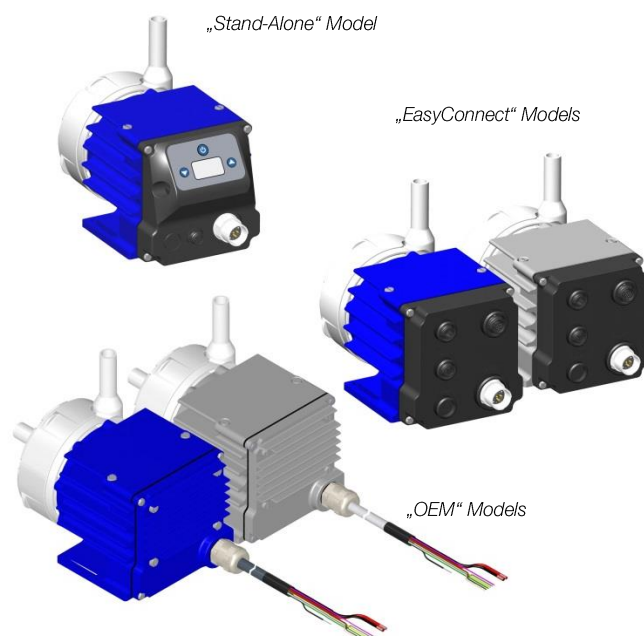


Figure 5: Pump system models

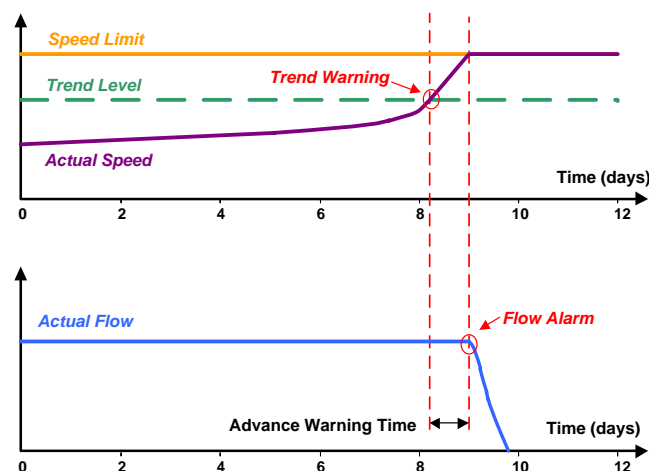


Figure 6: Dynamic Condition Trending (DCT)

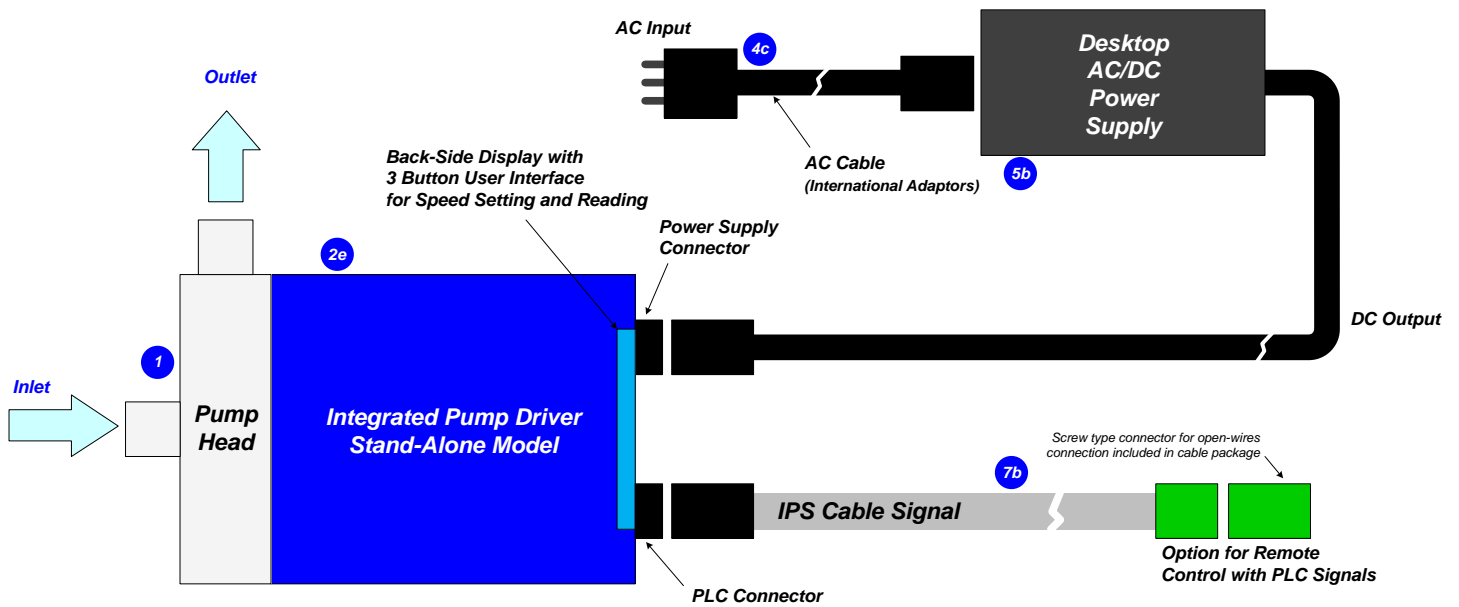


Figure 7: Standard "Stand-Alone" system configuration with main accessories
(See section "Order Information" for details to numbered components and other options)

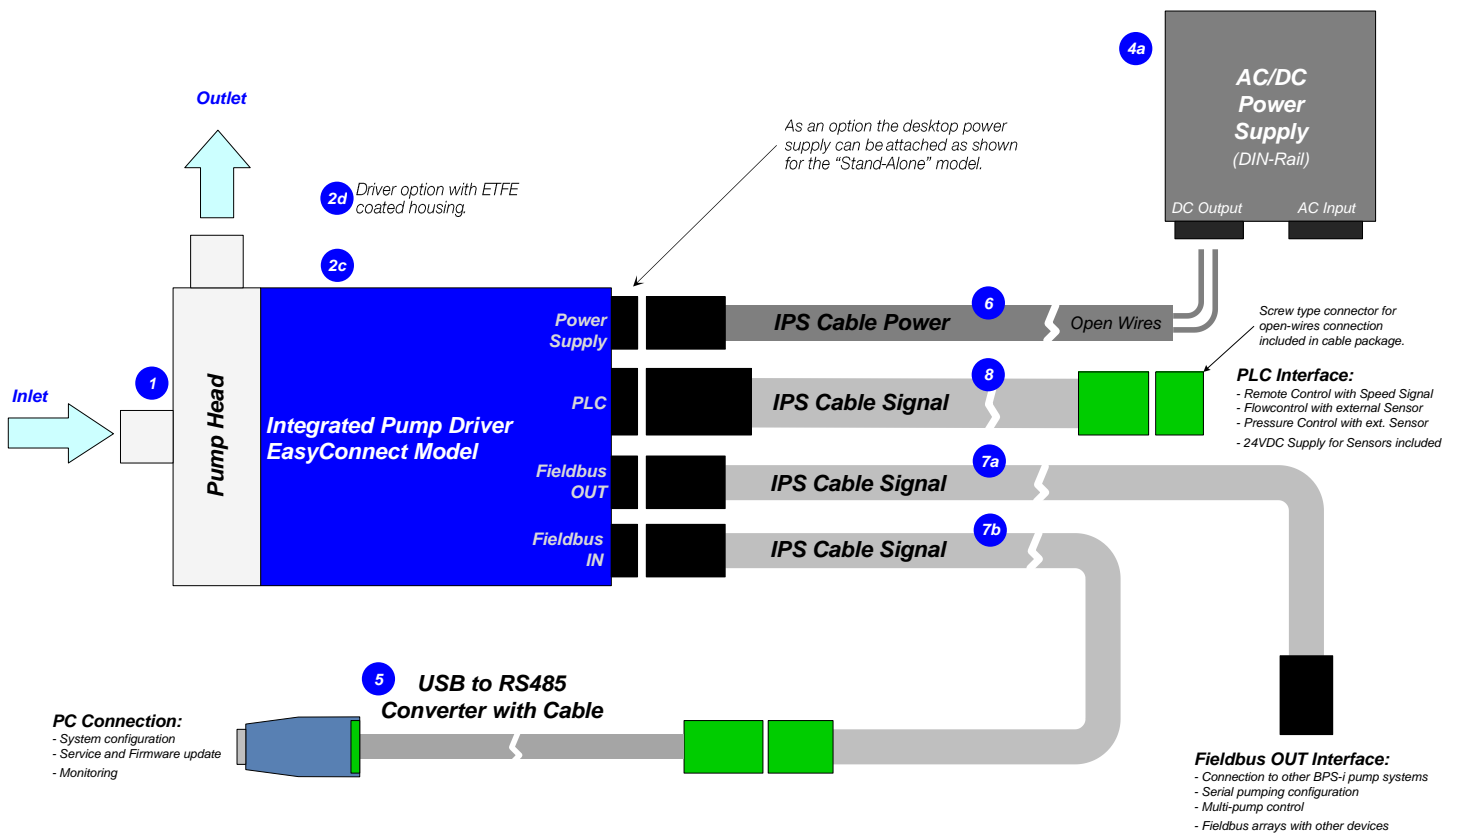


Figure 8: Standard "EasyConnect" system configuration with main accessories
(See section "Order Information" for details to numbered components and other options)

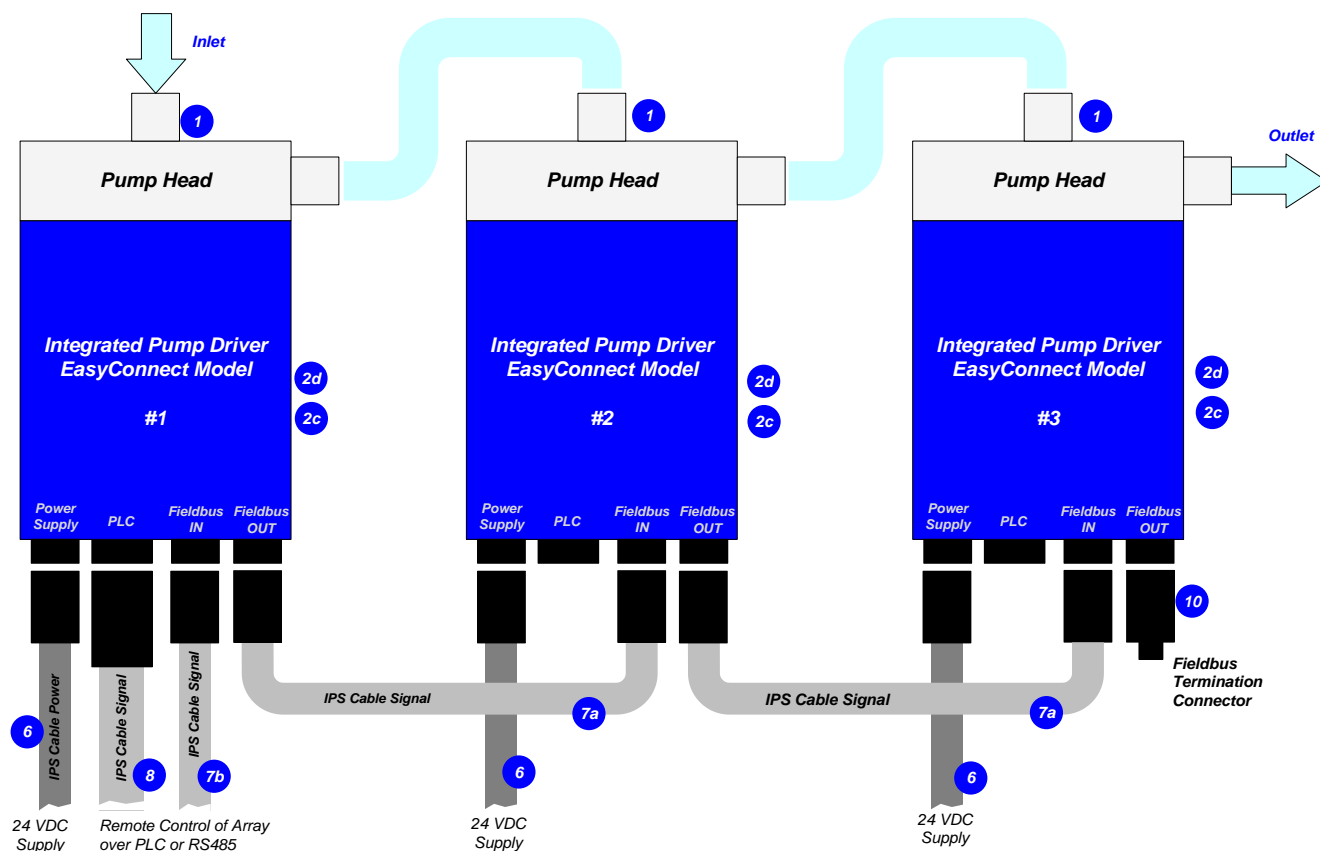


Figure 9: Serial pumping configuration with “EasyConnect” models
(See section “Order Information” for details to numbered components and other options)


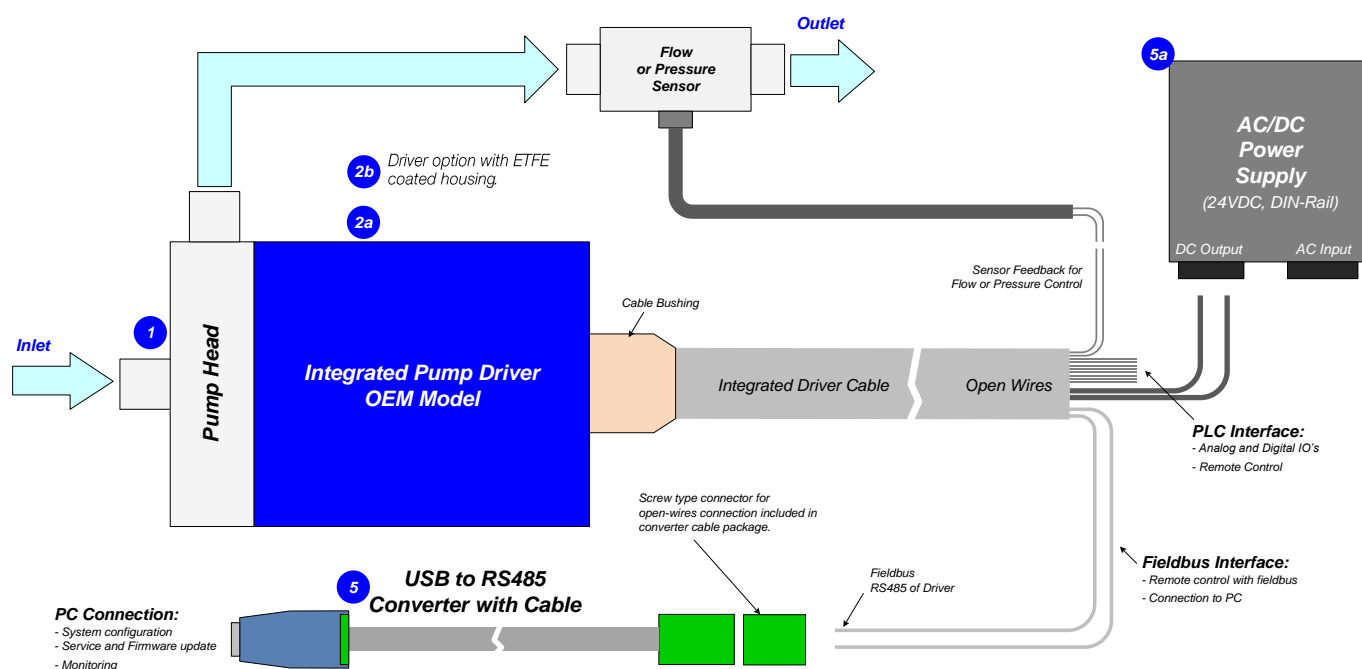


Figure 10: Standard “OEM” system configuration
(See section “Order Information” for details to numbered components and other options)

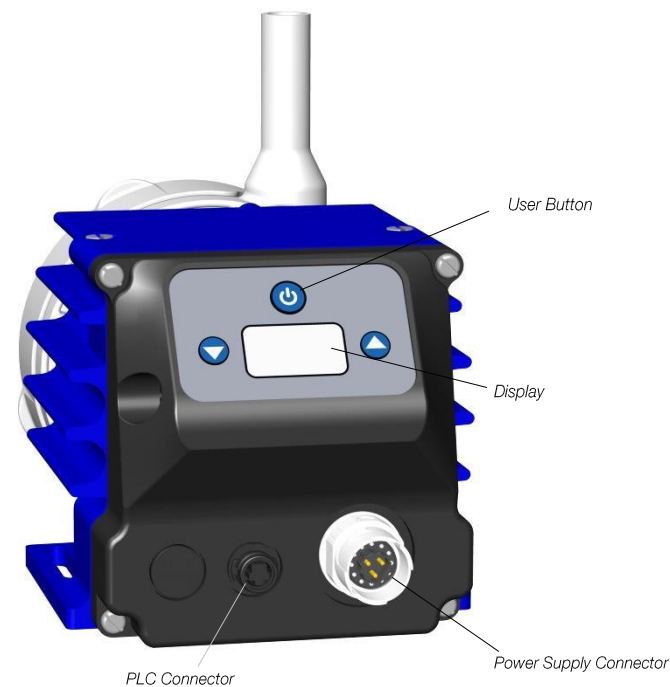

Interface	PIN Name	Description	Standard Designation	Hardware Specification
Power Supply	P+	+ 24 VDC	Supply	Voltage: 24 VDC Power: 100 W
	P-	Power Input Ground / Earth		
	NC	Not connected.		
PLC 6	Ain	Analog Input (Current Input)	Remote Speed	Analog current input: 4 ~ 20 mA (450 Ohm shunt input, no galvanic isolation)
	Ain_GND	Analog In. GND	--	Reference for Ain
	Dout	Digital Output 1	Status	Open drain, max. 24V, 100mA Reference ground is GND
	GND	Analog Ground	--	Reference for Dout
	Din1	Digital Input 1	Enable (Reset)	Galvanic separation with optocoupler 2.2 kΩ input resistance, 5-24V for active input
	Din_COM	Com. Digi. Input	--	Reference for digital input.
Display and Buttons	--	Display	Speed and Status Display	--
	--	Up/Down	Setting speed	--
	--	On/Off	Enable/Disable	--

Figure 11: Interface specifications of standard "Stand-Alone" model


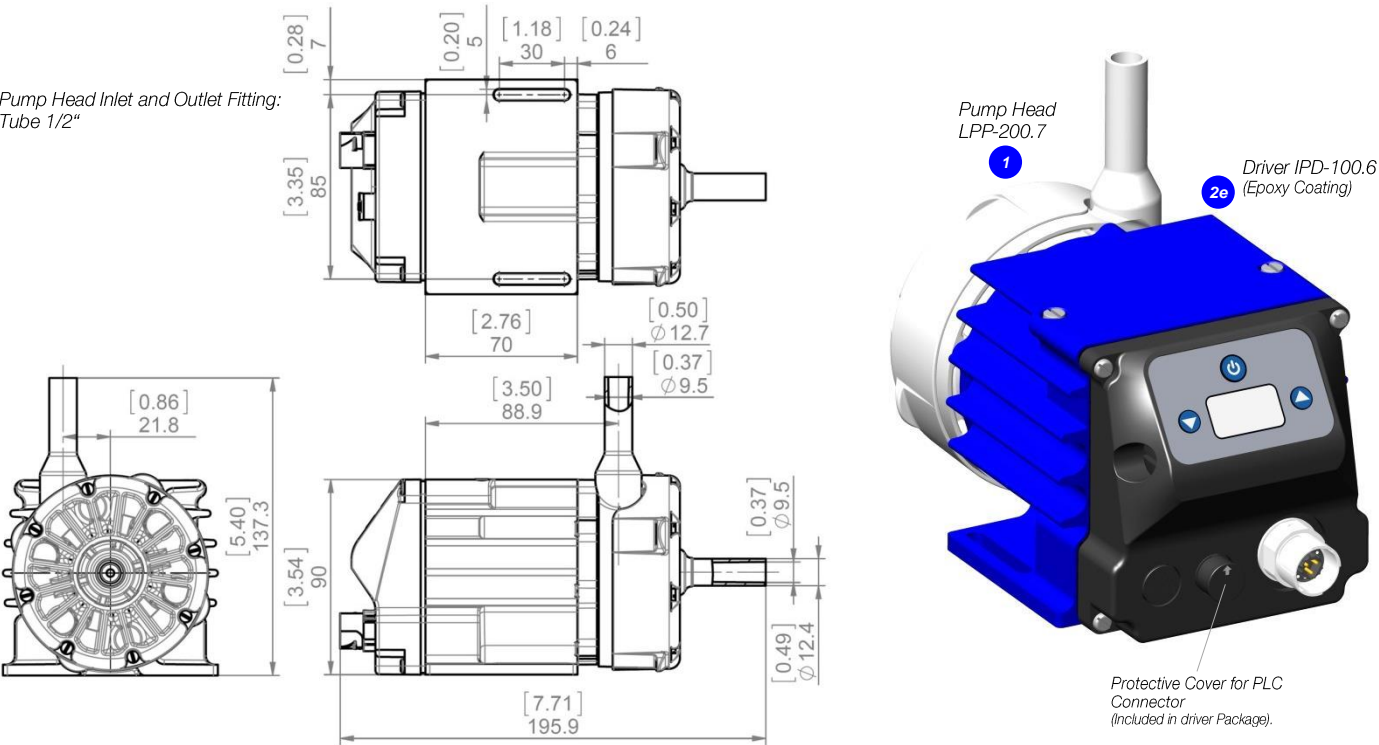


Figure 12: Basic dimensions and description of standard "Stand-Alone" model

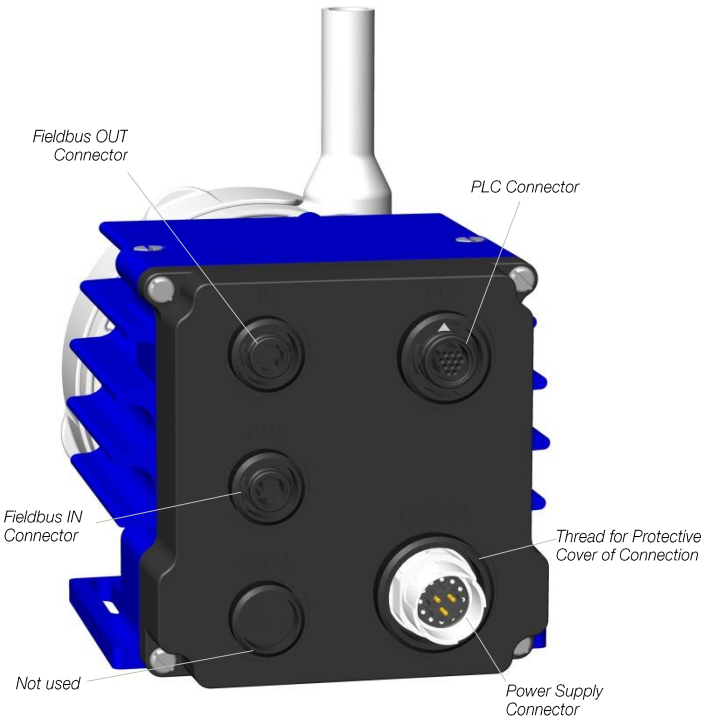

Connector	PIN Name	Description	Standard Designation	Hardware Specification
Power Supply	P+	+ 24 VDC	Supply	Voltage: 24 VDC
	P-	Ground / Earth		Power: 100 W
	NC	Not connected.	--	--
PLC 12	Dout1	Digital Output 1	Status	Open drain, max. 24V, 100mA
	Dout2	Digital Output 2	Error	Reference ground is GND
	Din1	Digital Input 1	Enable (Reset)	Galvanic separation with optocoupler
	Din2	Digital Input 2	Process Mode	2.2 k Ω input resistance, 5-24V for active input
	Din_COM	Com. Digi. Input	--	Reference for digital input.
	Ain1	Analog Input 1 (Current Input)	Actual Process Value	Analog current input: 4 – 20 mA (450 Ohm shunt input, no galvanic isolation)
	Ain2	Analog Input 2 (Voltage Input)	Reference Value	Analog voltage input: 0 – 10V (7.9 kOhm, no galvanic isolation)
	Ain_GND	Analog In. GND	--	Reference for Ain1 and Ain2
	Aout1	Analog Output (Voltage Output)	Actual Speed	0 – 10V (no galvanic isolation)
	GND	Analog Ground	--	GND is reference
	Pout	Output 24 VDC	Supply output	For supply of external devices (e.g. sensors)
	NC	Not connected.	--	--
Fieldbus OUT	GND	Ground	--	Connected to AGND and reference for supply
	Pout	Output 24 VDC	Supply Output	For supply of external devices (user panels)
	RS485+	RS485 +	Field Bus	Modbus protocol
	RS485-	RS485 -		
	Internal	Internal Bus	Do not connect	Internal bus needed to connect pumps for serial pumping.
Fieldbus IN	Internal	Internal Bus	Do not connect	
	GND	Ground	--	Connected to AGND and reference for supply
	NC	Not connected.	--	--
	RS485+	RS485 +	Field Bus	Modbus protocol
	RS485-	RS485 -		
Internal	Internal	Internal Bus	Do not connect	Internal bus needed to connect pumps for serial pumping.
	Internal	Internal Bus	Do not connect	

Figure 13: Interface specifications of standard “EasyConnect” models


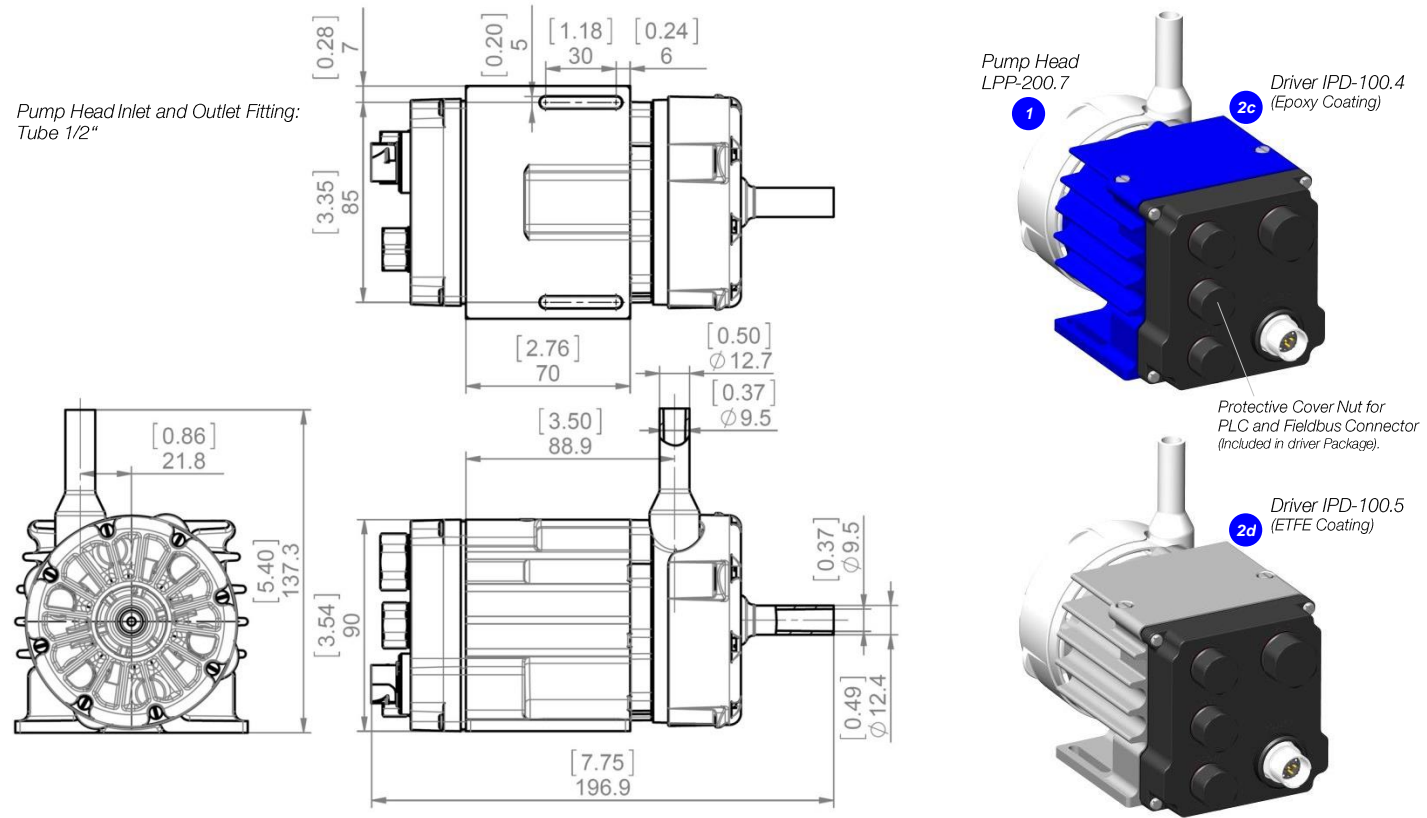


Figure 14: Basic dimensions and description of standard “EasyConnect” models

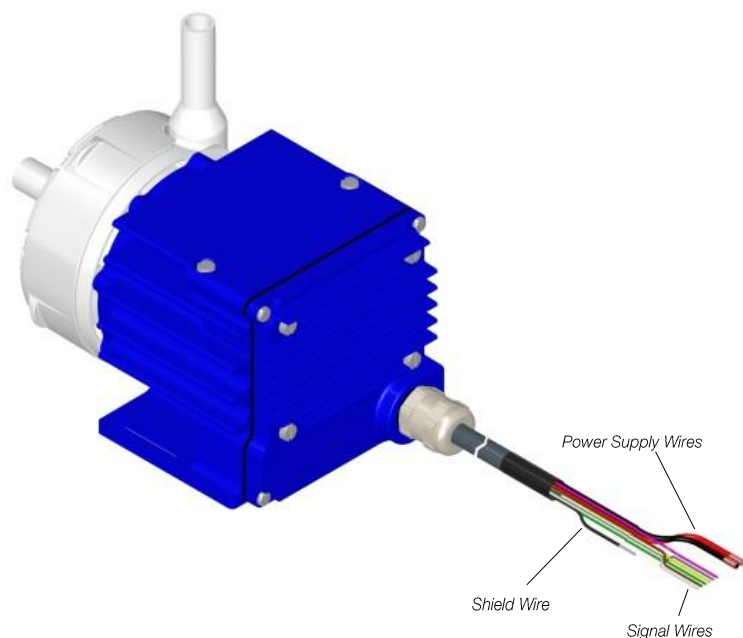

Wire Name	Description	Standard Designation	Hardware Specification
P+	+ 24 VDC	Supply	Voltage: 24 VDC
P-	Power Input Ground / Earth		P- to be connected to earth
Ain1	Analog Input 1 (Current Input)	Actual Process Value	Analog current input: 4 – 20 mA (450 Ohm shunt input, no galvanic isolation)
Ain2	Analog Input 2 (Voltage Input)	Reference Value	Analog voltage input: 0 – 10V (7.9 kOhm, no galvanic isolation)
Ain_GND	Analog Input Ground	--	Reference for Ain1 and Ain2
Din1	Digital Input 1	Enable (Reset)	Galvanic separation with optocoupler
Din2	Digital Input 2	Process Mode	2.2 kΩ input resistance, 5-24V for active input
Din_COM	Common Digital Input	--	--
Aout1	Analog Output (Voltage Output)	Actual Speed	0 – 10V (no galvanic isolation) AGND is reference
Dout1	Digital Output 1	Status	Open drain, max. 24V, 100mA
Dout2	Digital Output 2	Error	Reference ground is AGND
GND	Analog Ground	--	Reference for Aout1, Dout1 and Dout2
RS485+	RS485 +	Field Bus	Modbus protocol
RS485-	RS485 -		
Internal	Internal Bus	Do not connect	For internal usage.
Internal	Internal Bus	Do not connect	For internal usage.
Shield	Shielding	Shielding	To be connected to earth (see wire No. 2, P-)

Figure 15: Interface specifications of standard “OEM” models

Note 1: Power supply wires are 1.5mm² and signal wires 0.14mm² Note 2: For more detailed description of interfaces consult user manual

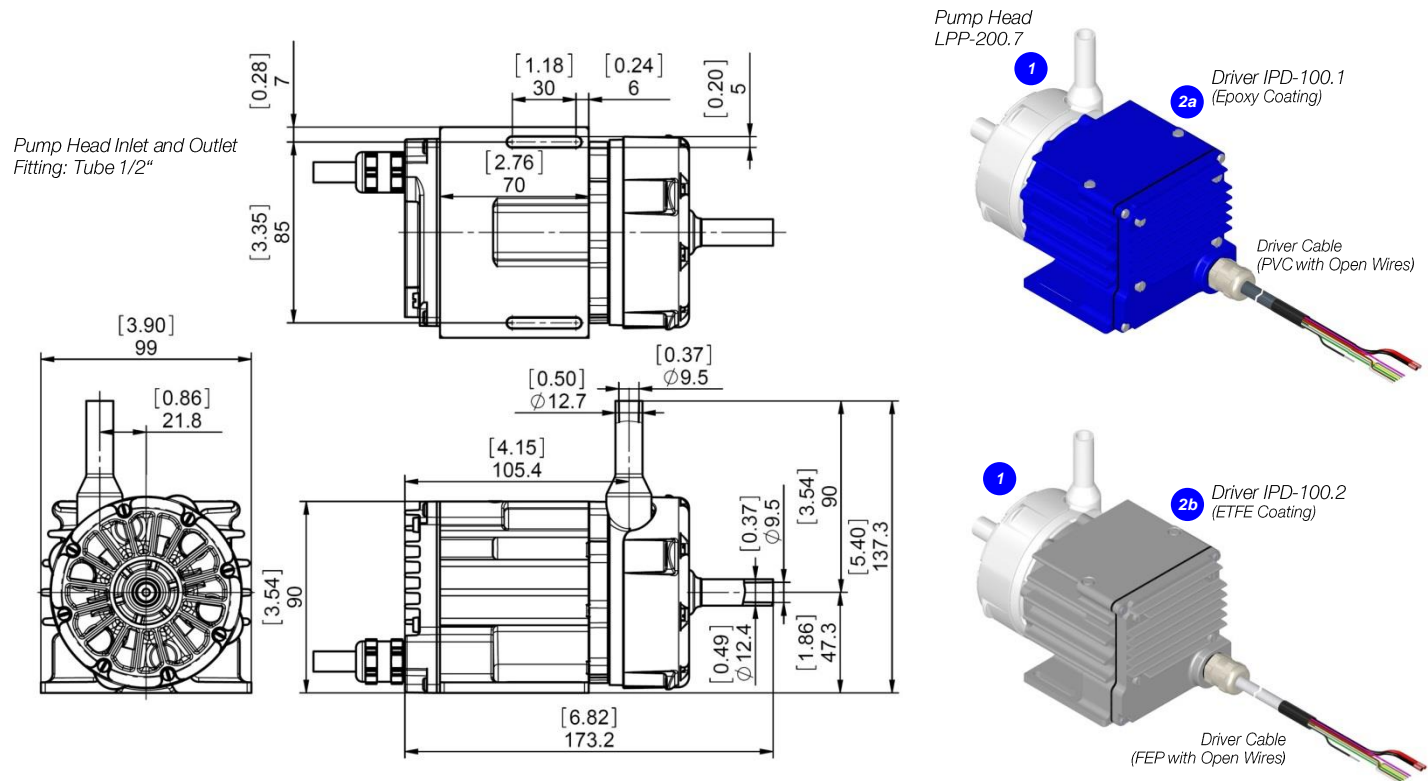


Figure 16: Basic dimensions and description of standard “OEM” models

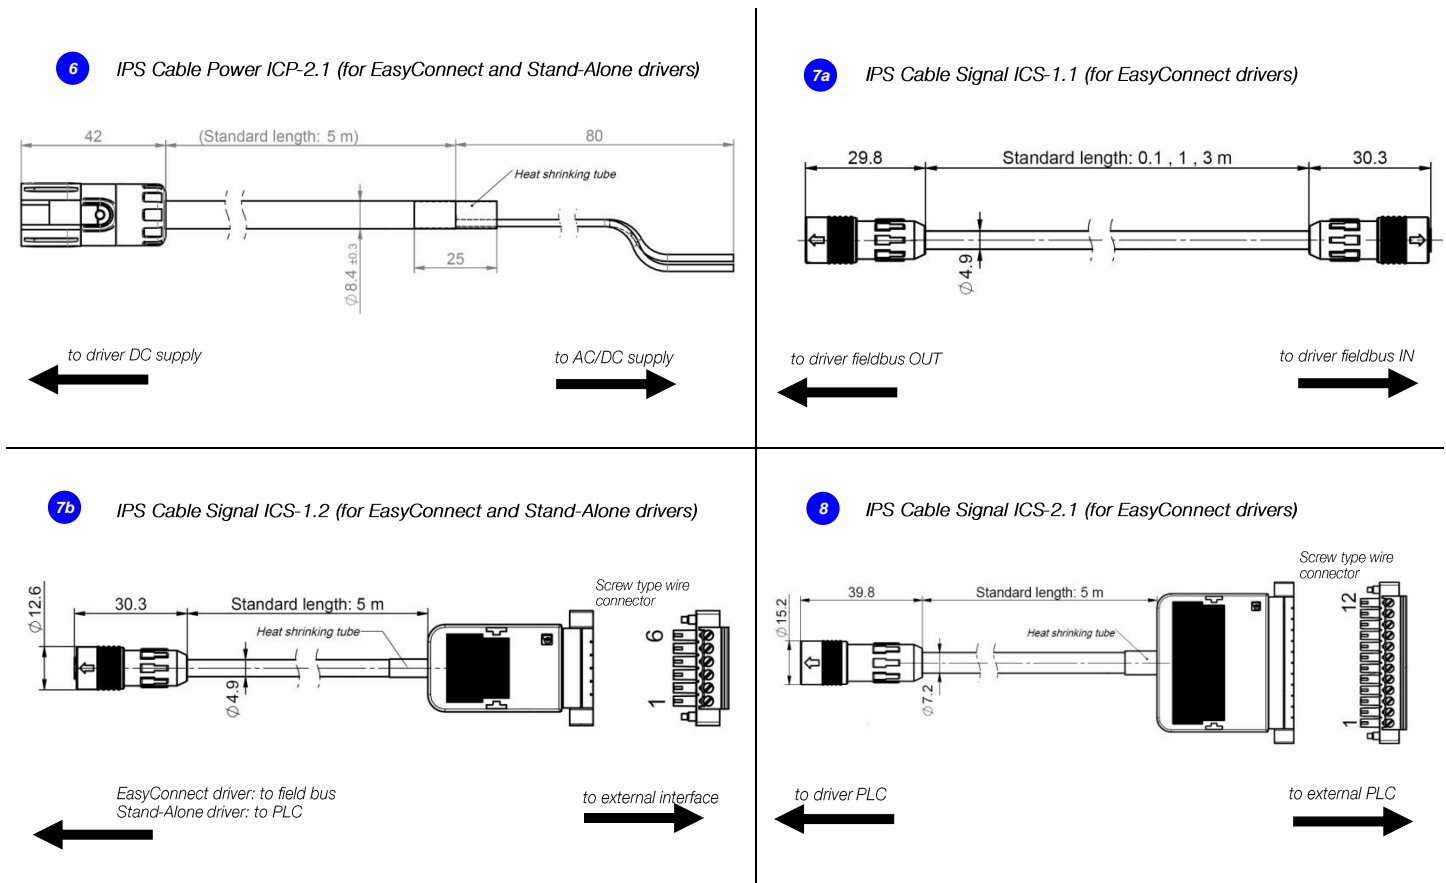


Figure 17: Basic dimensions and specifications of standard IPS cables

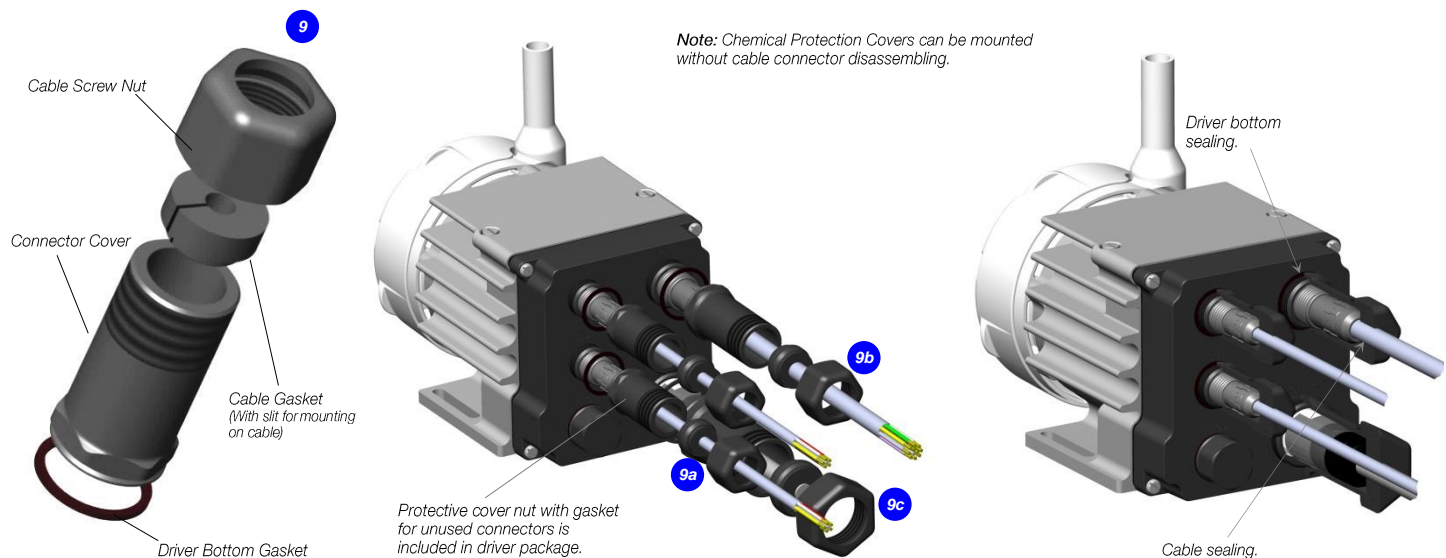


Figure 18: Basic concept of protective covers for enhanced chemical protection of driver connectors

ORDER INFORMATION

System Name	Article #	Pump Head	Driver	Note
BPS-i100.1	100-90719	LPP-200.7	IPD-100.1-50-01	OEM - Epoxy coated driver, 5 m PVC cable with open wires, PFA pump head.
BPS-i100.2	100-90720	LPP-200.7	IPD-100.2-50-01	OEM - ETFE coated driver, 5 m FEP cable with open wires, PFA pump head.
BPS-i100.8	100-91082	LPP-200.7	IPD-100.4-01	EasyConnect - Epoxy coated driver with interface connectors, PFA pump head.
BPS-i100.9	100-91083	LPP-200.7	IPD-100.5-01	EasyConnect - ETFE coated driver with interface connectors, PFA pump head.
BPS-i100.7	100-91041	LPP-200.7	IPD-100.6-01	Stand-Alone - Epoxy coated driver with integrated user panel, PFA pump head.

Table 1: Standard system configurations

Pos.	Component	Article Name	Article #	Characteristics	Value / Feature
1	Pump Head	LPP-200.7	100-90708	Impeller / Pump Housing Sealing O-Ring In-/Outlet Fittings Max. Flow Max. Diff. Pressure Max. Viscosity Max. Liquid Temp.	PFA / PFA Kalrez® perfluorelastomer ¹ 1/2" Tube 20 liters/min / 5.3 gallons/min 2 bar / 29 psi 20 cP 70 °C / 158 °F
2a 2b	Integrated Pump Driver ("OEM Models")	IPD-100.1-50-01 IPD-100.2-50-01	100-10069 100-10071	Voltage, Power Housing Cable Interfaces Standard Firmware	24 VDC ±10%, 100 W Epoxy (a) or ETFE (b) coated Aluminum, PP for bottom lid, IP65 ² PVC (a) or FEP (b) jacket, open wires, cable length 5 m PLC and RS485 with Modbus protocol (see Figure 15 for details) G1.48 ³
2c 2d	Integrated Pump Driver ("EasyConnect" Models)	IPD-100.4-01 IPD-100.5-01	100-10108 100-10109	Housing Interfaces Standard Firmware	Epoxy (c) or ETFE (d) coated Aluminum, PP for bottom lid, IP65 ² 2x Fieldbus RS485 with Modbus protocol, PLC and power supply G1.36
2e	Integrated Pump Driver ("Stand-Alone" Model)	IPD-100.6-01	100-10101	Housing Interfaces Standard Firmware	Epoxy coated Aluminum, PP for bottom lid, IP65 ² User panel with 3 user buttons, PLC and power supply G1.25

Table 2: Specification of standard components

1: Kalrez® is a registered trademark of DuPont Dow Elastomers 2: Designed and tested for IP67. 3: Special firmware for serial pumping as one unit (see Figure 9) available on request.

Pos.	Component	Article Name	Article #	Characteristics	Value / Feature
3	Impeller Exchange Kit	IEK-200.4	100-90733	Impeller LPI-200.5 (a) Sealing O-Ring (b) Pump Housing Screws (c) Pump Motor Screws (d) Exchange Tool IET-1.1 (e)	PFA O-Ring, Kalrez® 50.52 x 1.78 mm 6 pieces, stainless steel PTFE coated, M4 x 16 mm 8 pieces, stainless steel PTFE coated, M3 x 40 mm POM-C
4a	AC/DC Power Supply	TSP 180-124 (Traco)	100-40018	Voltage Output / Input Basic Dimensions Certification or Standards	24 VDC with 180 W / 85 – 132 and 187 – 264 VAC (autoselect) 110 x 110 x 54 mm (mountable on DIN rail 35 mm) UL/cUL, CB, Semi F47
4b	Desktop AC/DC Power Supply	GST160A24-R7B IC915	100-40020	Voltage Output / Input Basic Dimensions Safety Approvals Note	24VDC, 160W / 85 – 264 VAC, 47-63 Hz 175 x 72 x 35 mm UL60950-1, CSA C22.2, TUV EN60950-1 Connector for direct connection to power supply of driver, cable length 1.2 m.
4c	AC Mains Cables (for Desktop power supply 5b)	AMC-1.1 (2m) AMC-1.2 (2.5m) AMC-1.3 (2.5m) AMC-1.4 (2.5m) AMC-1.5 (2.5m)	190-10331 190-10332 190-10333 190-10334 190-10335	Cable Specifications Approvals and Country Approvals and Country Approvals and Country Approvals and Country Approvals and Country	Black color, ROHS UL, cUL, US, Canada CB, Germany, Denmark, Norway, Finland, Belgium, Netherland, Sweden, Austria PSE, Japan Switzerland CE, United Kingdom
5	USB to RS485 Adaptor-TR Isolated	YN-485I-TR	100-30392	Structure/Design Purpose	USB connector (5a) with termination resistor and cable with connector pair (5b and 5c) for external RS485 wire connection. Magnetically isolated. Cable length is 2m. Communication over fieldbus of driver with PC

Table 3: Specification of general accessories

Pos.	Component	Article Name	Article #	Characteristics	Value / Feature
6	IPS Cable Power 2 Wires	ICP-2.1-50 (5 m)	190-10370	Cable Material / Wires Connection In / Connection Out Main Purpose	PVC jacket / 2x 1.5 mm ² Open wires / Circular Interconnect type to driver Connection of power supply to "Stand-Alone" and "EasyConnect" drivers
7a	IPS Cable Signal 6 Wires	ICS-1.1-02 (0.2 m) ICS-1.1-10 (1 m) ICS-1.1-30 (3 m)	190-10381 190-10344 190-10345	Cable Material / Wires Connection In / Connection Out Main Purpose	PVC jacket / 6x 0.08 mm ² and shielding Circular Hirose type / Circular Hirose type Fieldbus connection between "EasyConnect" drivers (e.g. multi-pump arrays)
7b	IPS Cable Signal 6 Wires	ICS-1.2-50 (5 m)	190-10346	Cable Material / Wires Connection In / Connection Out Main Purpose	PVC jacket / 6x 0.08 mm ² and shielding Connector with screw type plug for open wire connection / Circular Hirose type Fieldbus connection to "EasyConnect" drivers and to PLC of "Stand-Alone" drivers.
8	IPS Cable Signal 12 Wires	ICS-2.1-50 (5 m)	190-10347	Cable Material / Wires Connection In / Connection Out Main Purpose	PVC jacket / 12x 0.14 mm ² and shielding Connector with screw type plug for open wire connection / Circular Hirose type General connection to PLC of "EasyConnect" drivers.
9a 9b 9c 9d	Chemical Protection Connector Cover	CPC-1.1 CPC-1.2 CPC-1.3 CPC-1.5	190-10349 190-10350 190-10351 190-10352	Materials, IP-Rating Main Purpose of CPC-1.1 Main Purpose of CPC-1.2 Main Purpose of CPC-1.3 Main Purpose of CPC-1.5	PP+GF30 and FPM/FKM for sealing gaskets, IP65 ¹ Chemical protection of driver connectors of ICS-1.x cables. Chemical protection of driver connectors of ICS-2.x cables. Chemical protection of driver connector for supply with ICP-2.1 cable. Chemical protection of fieldbus termination connector FTC-1.1
10	Fieldbus Termination Connector	FTC-1.1	190-10348	Materials Main Purpose	PPS for connector housing and FPM for sealing. Termination of fieldbus.

Table 4: Specification of cables and other accessories

1: Designed and tested for IP67.



Figure 19: Pump systems with standard components



Figure 20: General accessories

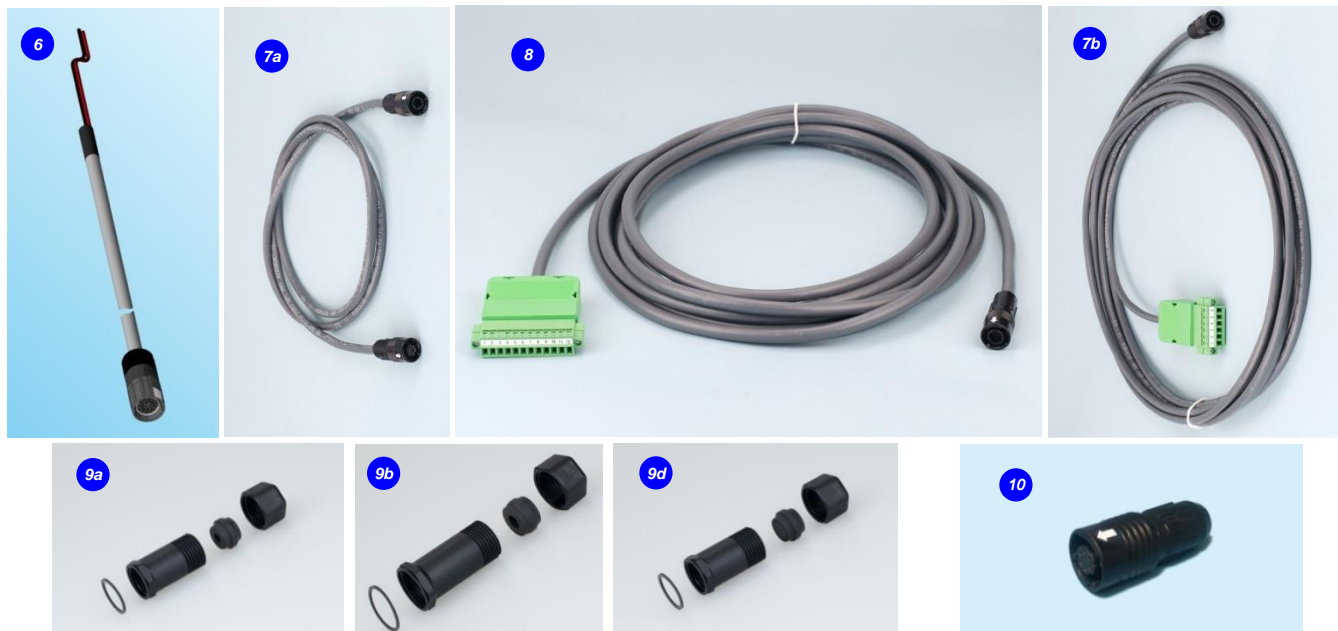


Figure 21: Cables and cable accessories

Levitronix® is the world-wide leader in magnetically levitated bearingless motor technology. *Levitronix®* was the first company to introduce bearingless motor technology to the Semiconductor, Medical and Life Science markets. The company is ISO 9001 certified. Production and quality control facilities are located in Switzerland. In addition, *Levitronix®* is committed to bring other highly innovative products like the *LEVIFLOW®* flowmeter series to the market.



Headquarter and European Contact

Levitronix GmbH
Technoparkstr. 1
CH-8005 Zurich
Switzerland

Phone: +41 44 445 19 13
Fax: +41 44 445 19 14
E-Mail: salesEurope@levitronix.com

US Contact

Levitronix Technologies LLC
20 Speen Street, Suite 102
Framingham, Massachusetts 01701
USA

Phone: +1 508 861 3800
Fax: +1 508 861 3837
E-Mail: salesUS@levitronix.com

Japan Contact

Levitronix Japan K.K.
Wing Eight 5floor, 4-16-4
Asakusabashi, Taito-ku
Tokyo, 111-0053 Japan

Phone: +81 3 5823 4193
Fax: +81 3 5823 4195
E-Mail: salesJapan@levitronix.com

Taiwan Contact

Levitronix Taiwan
5F, No. 251, Dong Sec. 1, Guangming
6th Rd., Chu Pei City,
Hsin-Chu 302, Taiwan, R.O.C.

Phone: +886 3 657 6209
Fax: +886 988 321472
E-Mail: salesAsia@levitronix.com