

L21 Series

High Pressure Regulator


RoHS Directive Products

Inlet Pressure	Max.24 MPaG (Max.3,480 PSIG)
Outlet Pressure	Max.0.99 MPaG (Max.144 PSIG) (Pressure Range: 0~0.2 MPa, 0~0.4 MPa, 0~0.6 MPa, 0~0.99 MPa)
Supply Pressure Effect	0.0005 MPaG (0.0725 PSIG) per 0.1 MPaG (14.5 PSIG)
Proof Pressure	31.5 MPa (4,567 PSI), 1.5 MPa (Outlet Side)
CV	0.09
Temperature	-10°C to +40°C
Outboard Leakage	1×10 ⁻¹¹ Pa·m ³ /sec·He (1×10 ⁻¹⁰ atm·cc/sec·He)
Internal Volume	4.75 cc (0.29 in ³) w/o fittings
Approximate weight	1.4 kg (3 lbs. 1 oz.)
Installation	Threaded holes on the rear surface or Panel mounting

[NOTE]
1MPa = 10.2 kgf/cm² = 145.04 PSI
1MPa = 7504.36 mmHg = 295.4 inHg




Cross sectional drawing

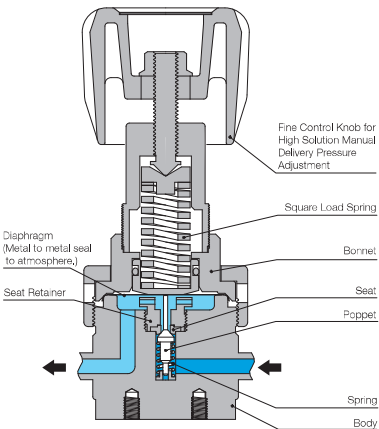


[NOTE]
· Avoid turning the control knob excessively.
· Series L25,L26 are recommended for Chlorine (Cl₂) service and Nitrous Oxide (N₂O) service.
· No filter in this unit.

Flow characteristics

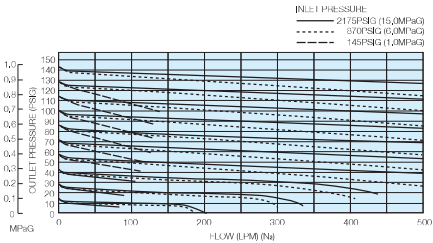

[NOTE]
· These tests were performed at ambient conditions.

Outline drawing

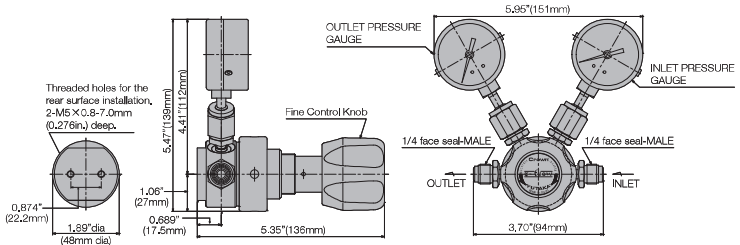

[NOTE]
· Dimensions are in inches and (mm) for reference only.
· Face to face length of the male and female are the same.
· Subject to change without notice.

Materials of construction

MODEL & TYPE	L21SS	L21SH	L21SS-CO
Wetted Parts			
Body	SUS316L		
Poppet & Seat Retainer	SUS316L	Hastelloy [®] C-22	SUS316L
Diaphragm	Hastelloy [®] C-22		
Seat	PCTFE		
Spring	SUS316	Hastelloy [®] C-22	SUS316
Gasket to seal for gauge	Ni		
Non-wetted Parts			
Bonnet	SUS316, C3604BD		
Control Knob	ABS Resin		
O-ring	NBR		

Wetted surface finishes

Standard Ra (GRADE "B")	32μin. (0.80μm) or less
Optional Ra (GRADE "A")	7μin. (0.18μm) or less

Standard connections

1/4" face to face length of the male and female are the same. 3.70in. (94mm)
1/4" Tube stubs and other connections available as options.

[NOTE]
· Any combination of Face Seal male and/or female fittings are available for inlet and outlet.
· Size and configuration of pressure gauge port is 1/4" Face Seal male.

Ordering information

