

# L88 Series RoHS Directive Products


## High Pressure Regulator (Recommended for B<sub>2</sub>H<sub>6</sub>, NF<sub>3</sub> Service)

Inlet Pressure	Max.24 MPaG (Max.3,480 PSIG)
Outlet Pressure	Max.0.99 MPaG (Max.144 PSIG) (Pressure Range: 0~0.2 MPa, 0~0.4 MPa, 0~0.6 MPa, 0~0.99 MPa)
Supply Pressure Effect	0.00075 MPaG (0.109 PSIG) per 0.1 MPaG (14.5 PSIG)
Proof Pressure	31.5 MPa (4,567 PSIG)
CV	0.10
Temperature	-10°C to +40°C
Outboard Leakage	1×10 <sup>-11</sup> Pa·m <sup>3</sup> /sec·He (1×10 <sup>-10</sup> atm·cc/sec·He)
Internal Volume	12.58 cc (0.77 in <sup>3</sup> ) w/o fittings
Approximate weight	2.4 kg (5 lbs, 5 oz.)
Installation	Threaded holes on the rear surface or Panel mounting

[NOTE]  
1MPa = 10.2 kg/cm<sup>2</sup> = 145.04 PSI  
1MPa = 7504.36 mmHg = 295.4 inHg



### Outline drawing

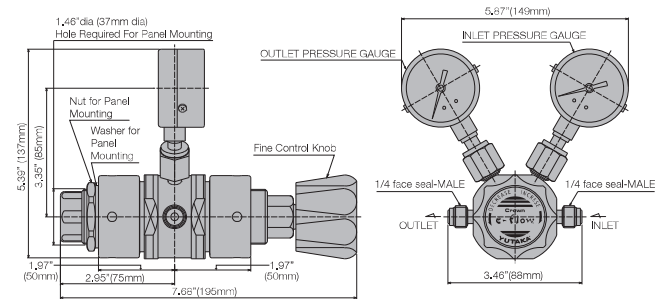

[NOTE]  
· Dimensions are in inches and (mm) for reference only.  
· Subject to change without notice.

### Materials of construction

MODEL & TYPE	L88SS	L88SH
Wetted Parts		
Body		SUS316L
Poppet & Seat Retainer	SUS316L	Hastelloy® C-22
Diaphragm		Hastelloy® C-22
Seat		PTFE
Spring		SUS316
Gasket to seal for gauge		Ni
Non-wetted Parts		
Bonnet		SUS316
Control Knob		ABS Resin
O-ring		NBR

### Wetted surface finishes


Standard Ra (GRADE "B")	32µin. (0.80µm) or less
Optional Ra (GRADE "A")	7µin. (0.18µm) or less

### Standard connections

1/4" face to face length of the male and female are the same, (Male) ..... 3.46in. (88mm)  
1/4" face to face length of the male and female are the same, (Female) ..... 4.13in. (105mm)


[NOTE]  
· Any combination of Face Seal male and/or female fittings are available for inlet and outlet.  
· Size and configuration of pressure gauge port is 1/4" Face Seal male.

### Cross sectional drawing

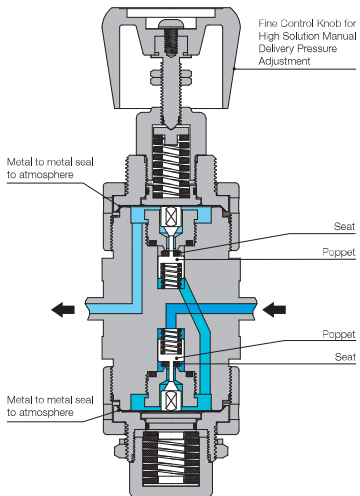

[NOTE]  
· Avoid turning the control knob excessively.  
· No filler in this unit.

### Flow characteristics

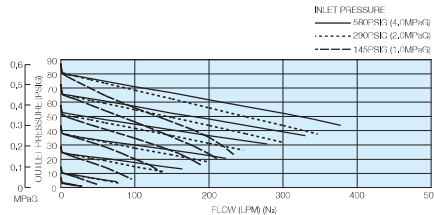

[NOTE]  
· These tests were performed at ambient conditions.

### Ordering information

